


FORGED BRASS GATE VALVES - IS 13144

SPECIFICATIONS

SCREWED IN BONNET, INSIDE SCREW, NON-RISING STEM, INTEGRAL SEAT, SOLID WEDGE, SCREWED FEMALE PARALLEL THREADS TO IS 554. OTHER FORMS OF THREADS CAN BE PROVIDED ON REQUEST.

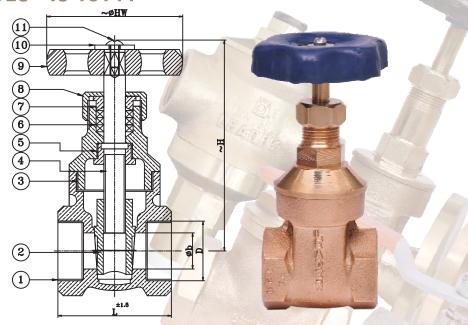

_				·				
STANDARD MATERIAL COMBINATION								
	P.NO.	DESCRIPTION		MATERIALS	SPEC		CIFICATIONS	
	1	BODY		FORGED BRASS	IS 69		9 12 GR. FLB	
	2	WEDGE		FORGED BRASS		IS 69	12 GR. FLB	
	3	BONNET		FORGED BRASS	IS 69		12 GR. FLB	
	4	STEM		FORGED BRASS F	DD IS 69		912 GR. FHTB1	
	5	STEM NUT		FORGED BRASS	IS 69		921 GR. FHTB1/IS 6912 GR. FLB	
	6	GLAND PACKING		HEMP & JUTE / AS	EMP & JUTE / ASBESTOS IS 5		5414 / IS 4687	
	7	GLAND		FORGED BRASS		IS 69	IS 6921 GR. FHTB1/IS 6912 GR. FLB	
	8	GLAND NUT		FORGED BRASS		IS 6921 GR. FHTB1/IS 6912 GR. FLB		
	9	HANDWHEEL	NDWHEEL		C.I/ STEEL (PVC COATED)		IS 210 FG200/ANY GRADE	
	10	10 WASHER		STEEL		ANY GRADE		
	11	11 SET SCREW		STEEL		ANY GRADE		
DIMENSIONAL DATA								
		SIZE (mm)		15	20		25	
	L		52	56		65		
	Øb		12.7	19		25		
	н		76	82		100		
	HW		48	60		60		
		D		1/2" 3/4"			1"	
	P	APROX WT. 🛧		0.285 0.405		0.625		
		ITEM CODE		IS 026 IS 026			IS 026	
TEST PRESSURES								
	MAY WADKING DDESSIDE			HELL TEST DROSTATIC)	SEAT & BACK SEAT (HYDROSTATIC)		STANDARD NO.	
		2 MPa 3 Mp.		a (435 Psig)	2.2 Mpa (319 Psig)		IS 13114	

NOTE: The above data is subject to change without notice due to our continuing product improvement program.

(WEIGHT GIVEN IN KGS)